



Pella
PRODUCTS

ROLSCREENS
★
VENETIAN BLINDS
★
CASEMENTS



THE 3 FAMOUS *Pella* PRODUCTS



Pella ROLSCREENS

The standard of leadership among inside, rolling window screens. Once in place — always in place! Inconspicuous—they preserve the beauty of sparkling glass. Trouble-free operation assured by 15 exclusive, patented features.



Pella VENETIAN BLINDS

Truly the mark of practical elegance. Pella conceals all mechanism in neat, enclosed head piece only 1 3/8" deep! Positive double roller tilting device prevents slipping — trebles cord life! Finest materials. Gorgeous colors.



Pella CASEMENT WINDOWS

The only really complete window! Metal frame—wood lined. Rolscreened. Weather stripped. Dual glazed. Completely factory assembled. Meets rigid requirements of modern heating and air conditioning. For all types of architecture.



Pella
ROLSCREENS



MODERN PELLA ROLSCREENS preserve the architectural beauty of clear, sparkling windows because they are so inconspicuous.

Old-fashioned, flat frame screens blot out beautiful windows—actually making a house old years before its time!

Specify ROLSCREENS—they help keep the homes you design looking like new.

Home owners never cease to appreciate the convenience of ROLSCREENS—nor do they ever seem to tire of proudly demonstrating them to friends and visitors.

ROLSCREENS are fool-proof. Designed, engineered and durably built to give trouble-free, lifetime service. Over 1 ½ million are in use today in homes and buildings costing \$5000 and up.

10 YEAR GUARANTEE—ROLSCREENS are guaranteed against defects in workmanship or material for a period of ten years. A new ROLSCREEN or parts will be furnished FREE OF CHARGE for any failing under this GUARANTEE. This does not cover damage or abuse to the screen or any other condition beyond the normal control of the ROLSCREEN COMPANY.



Pella ROLSCREEN

TYPICAL WIDTH DIMENSIONS

PELLA ROLSCREEN INSTALLATION DETAIL

IMPORTANT: RolSCREENs are built in Standard Stock Sizes, varying by just 1" in widths, from 10" to 61", inclusive. The "A" widths as indicated are nominal stock size widths. An example of possible variation in over-all widths of a 24" stock size is given at right. The over-all width on this 24" size can vary from a minimum of 23" to a maximum of 23 7/8".

The "B" dimension taken from face to face of stops MUST BE CONTROLLED to any "half-inch", viz., 22 1/2" for this 24" stock size example. This dimension can always be arrived at by varying the thickness of the stops. For close fit this "B" dimension may be reduced by 1/8" to, for instance, 22 3/8", 23 3/8", etc., but it must be accurately adhered to.

Three flange widths on guides are available as shown.

"H" is height dimension and can vary.

"B" THIS DIMENSION MUST BE CONTROLLED TO ANY "HALF-INCH" VIZ., 22 1/2" FOR 24" ROLSCREEN. FOR CLOSE FIT "B" MAY BE REDUCED 1/8" TO 22 3/8"

"A" MINIMUM OVER-ALL STANDARD FLANGE GUIDES 23 3/8"

"A" MINIMUM OVER-ALL NARROW FLANGE GUIDES 23"

"A" MINIMUM OVER-ALL WIDE FLANGE GUIDES 23 7/8"


VARIES

9" / 16"


3" / 8"

13" / 16"


DOUBLE HUNG

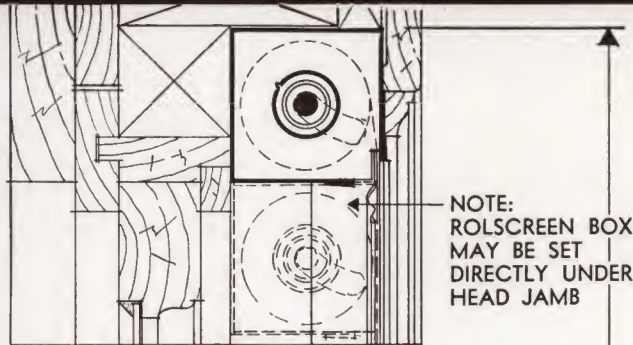


HEAD

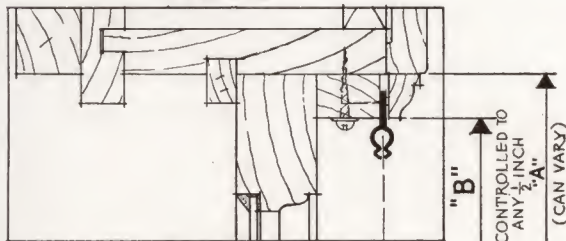

JAMB

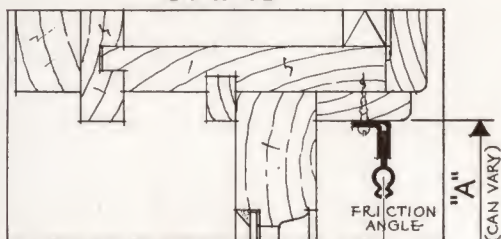


ALTERNATE JAMB

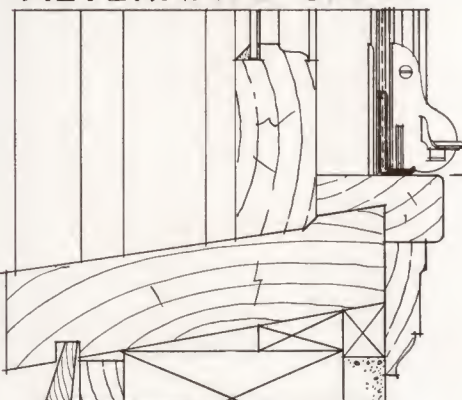


SILL


WOOD CASEMENTS

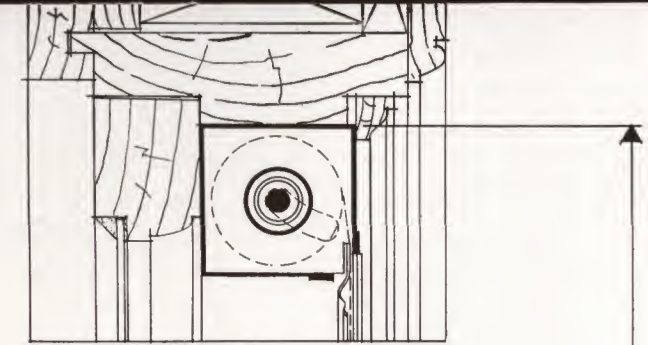


HEAD

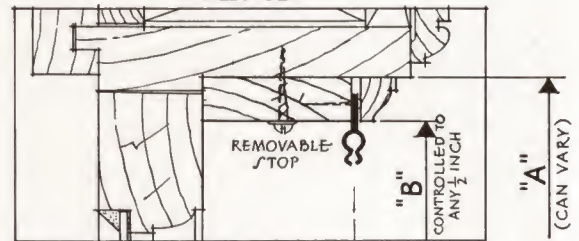

JAMB

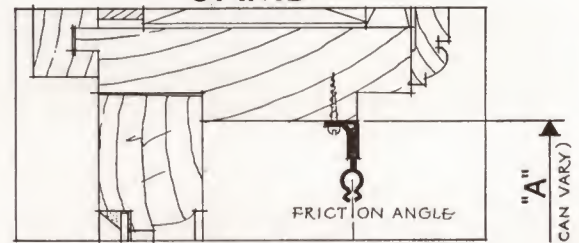

ALTERNATE JAMB

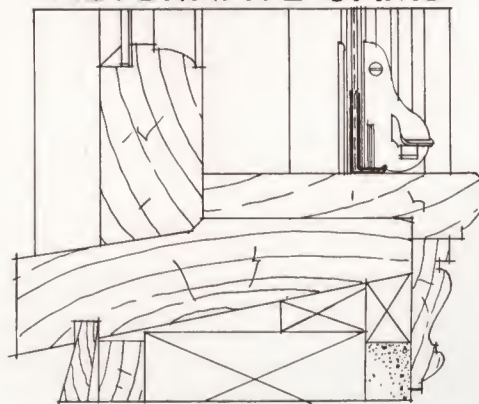

SILL

INSTALLATION DETAIL

4 HOUSING SIZES

25/8" Housing is considered Standard and can be used for heights up to 84".

27/8" Housing must be used for heights over 84".


21/8" Housing may be used for heights up to 54".

17/8" Housing may be used for heights up to 36".

REVERSED OPERATING BAR — If desirable, the operating bar attached to the bottom of the screen cloth can be reversed so that the screen cloth will unroll out of the back of the housing instead of the front, thus placing the cloth and side guides nearer the sash.



MULLIONS

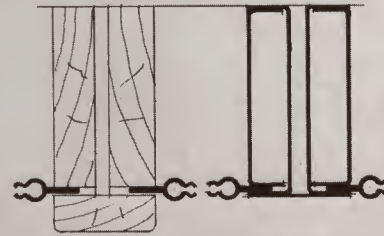


MULLIONS MAY BE MADE UP OF WOOD OR STEEL. STEEL MULLIONS FURNISHED BY ROL-SCREEN COMPANY

SPECIAL MOUNTINGS


FRICITION ANGLE (DETAIL NO. 50)



STEEL CASEMENTS

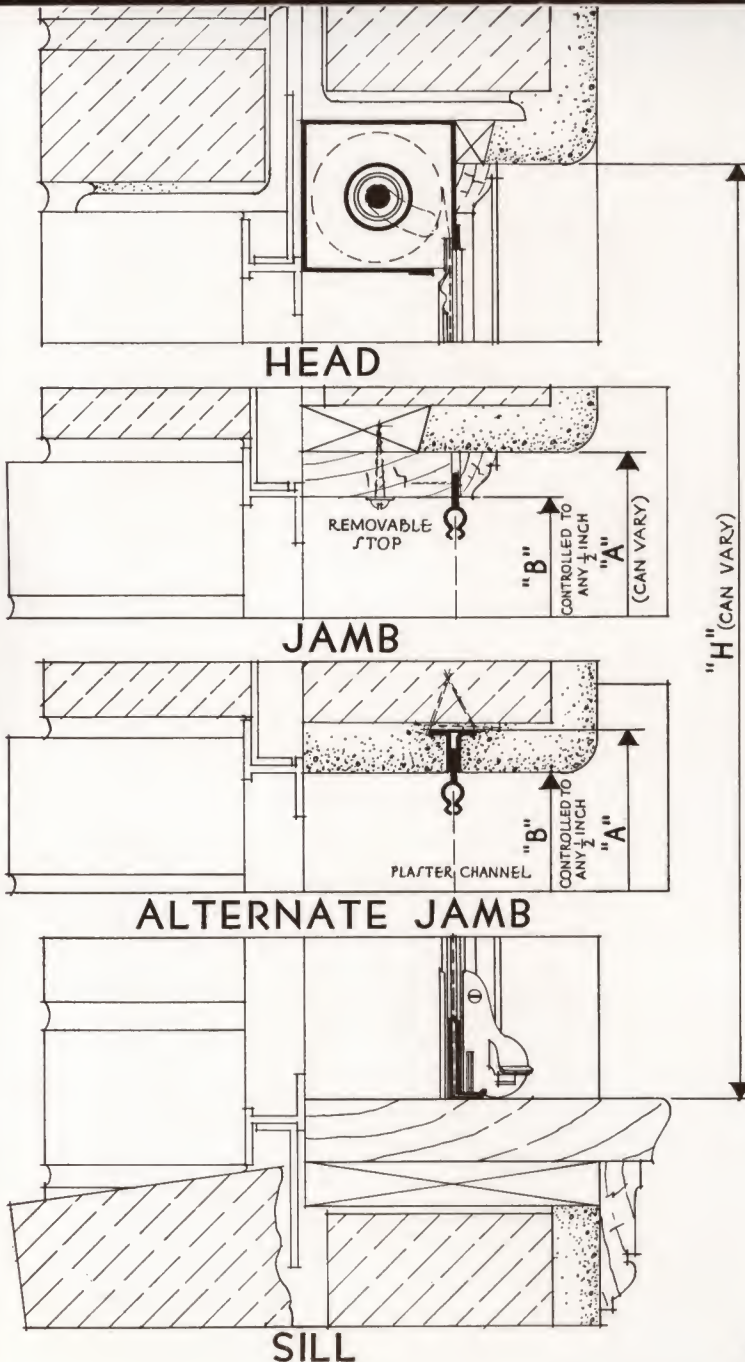

STEEL CASEMENTS

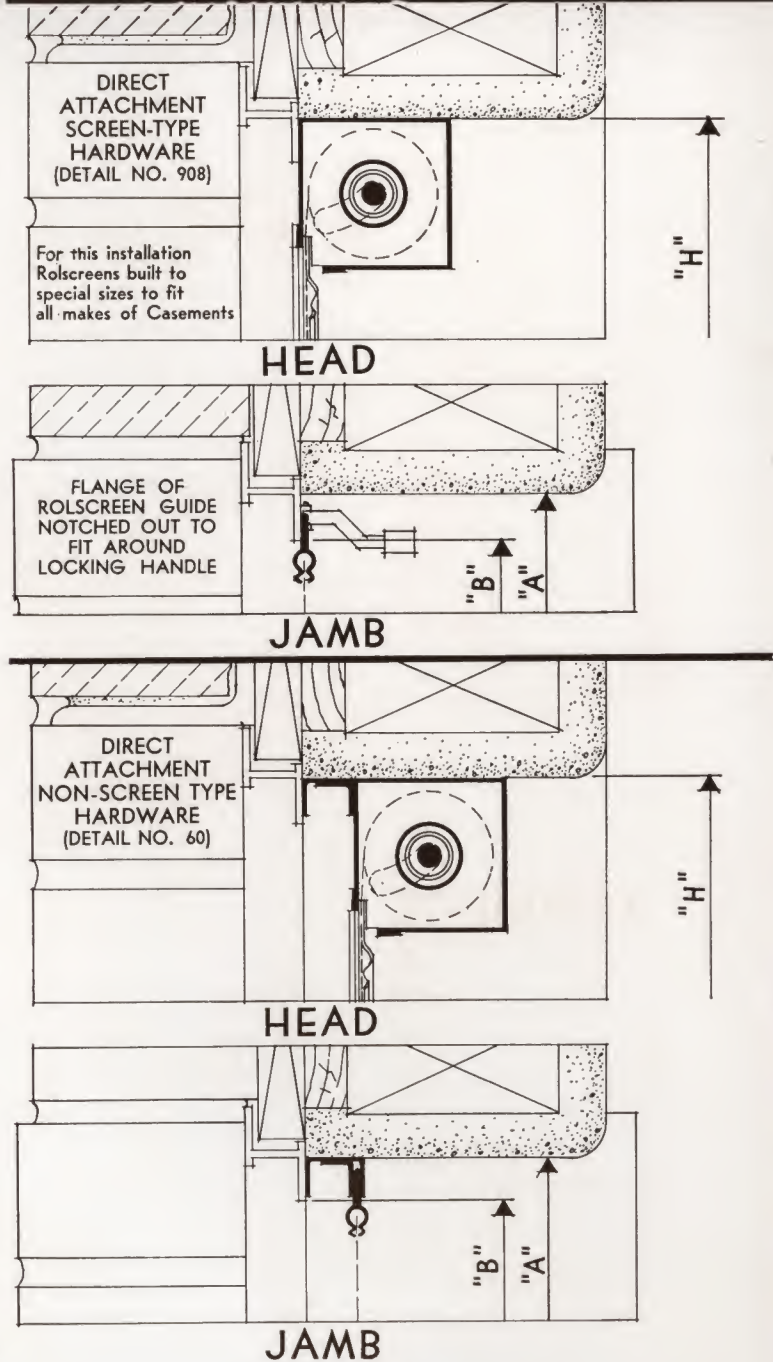

1. SCREEN GUIDES automatically adjust if woodwork shrinks or swells.



2. INDESTRUCTIBLE. Rolscreens will not bulge or tear. Wire-cloth releases from guides when and if struck—then automatically re-enters guides when screen is raised.

3. LUGS IN SELVAGE are gripped by inconspicuous Rolscreen guides to prevent sagging of wire-cloth.


4. COIL SPRINGS are extra-heavy and oil tempered. Will not jam or fail.



5. SPRING TENSION is easily adjusted without disturbing screen.



6. BALL BEARINGS at both ends of roller assure smooth, easy operation, long life.

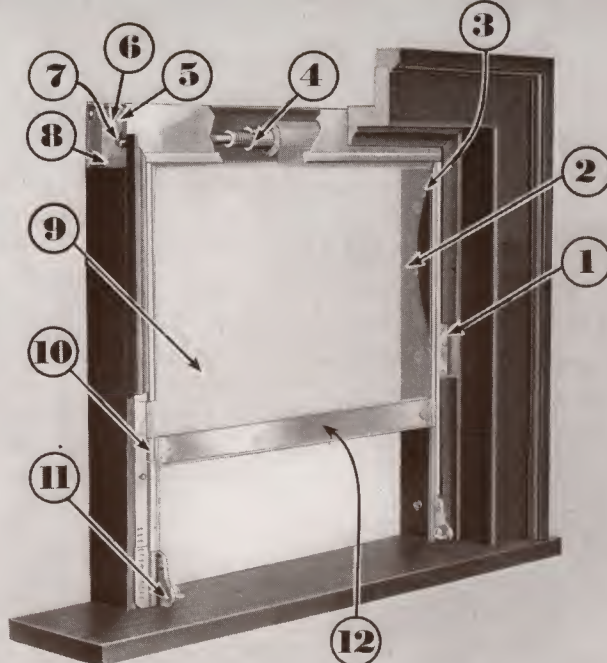


7. ROLLER FLOATS forward when screen is lowered; backward when screen is raised. Eliminates drag on wire-cloth at housing edge.

8. INVISIBLE ROLLER HOUSING made of lead-coated, terne-plate which makes perfect bond for paint. Electrically welded construction.

9. ALUMINA WIRE-CLOTH is triple-selvaged, rust-proofed — almost invisible. Self-cleaning. Will not break or crack under constant flexing. Clear grey color gives maximum visibility.

10. FRICTION BLOCKS prevent tilting of operating bar. Insure smooth, even operation at all times.

11. LOCK AUTOMATICALLY at bottom when lowered, giving secure fastening to all four sides of Rolscreen. Cannot be unlocked from outside.



12. PERFECT CLOSURE with sill is afforded by resilient, rubberized felt strip across bottom of operating bar.

SPECIFICATIONS

(A) SCREENS

Screens shall be (DeLuxe) (Standard) Rolscreens as manufactured by the Rolscreen Company, Pella, Iowa.

(B) WORK INCLUDED

Note: List and locate either in schedules on plans or in specifications under this heading. If both double hung and casement windows are included, list or schedule each under separate subheading.

(C) MATERIALS AND CONSTRUCTION

(C-1) **Metal**—Housing, guides and locking bar shall be constructed of heavy lead-coated terne-plate.

(C-2) **Wire Cloth**—Screen wire shall be 16 mesh rustproofed "AluminA" with triple selvage. The screen cloth shall have lugs spaced at regular intervals along the two edges which shall be engaged by the tubular guides.

(C-3) **Metal Housing and Roller Assembly**—The screen cloth shall be attached to a steel roller encasing a heavy, thoroughly lubricated, oil-tempered spring. The roller shall be (roller bearing) contained in a metal housing $2\frac{3}{8}$ in. square ($2\frac{7}{8}$ in. if opening is over 84 in.) Roller mounting shall be of floating type which allows roller to automatically move forward as size of screen roll reduces, eliminating "drag" of screen wire on lower edge of roller housing.

(C-4) **Guides**—The jamb guides shall be so mounted that they are slidably adjustable when the screen is raised or lowered to compensate for any expansion or contraction in the window frame. The guides shall be provided with lips at their upper ends inserted into slots in the roller housing (to assure proper alignment) with the beaded portion cut away adjoining the housing to allow the screen wire to re-enter the housing when accidentally knocked out of the guides.

(C-5) **Spring Catches**—Spring catches shall be attached to

Pella DeLuxe ROLSCREEN CONSTRUCTION
STANDARD ROLSCREENS do not have Nos. 5, 6, and 12 construction features. (Feature No. 12 may be had at slight extra cost.)

the lower end of the guides carefully adjusted to automatically lock the cross bar of the screen close to the sill.

(C-6) **DeLuxe Operating Bar and Spring Tension Adjuster**—Provide DeLuxe Operating Bars with rubberized felt sill contracts and Spring Tension Adjusters.

(D) WOOD JAMB STOPS

The wood stops, to which the screen guides are fastened and which support the roller housing, shall be furnished and installed with stop screws and washers by others.

(E) PLASTER JAMB CHANNELS

Rolscreen guides and housing shall be mounted on plaster jambs in Rolscreen Plaster Channels set in position before plastering. Channels shall be set absolutely plumb and true on each jamb and accurately on some "full inch" dimension back to back.

(F) FRICTION ANGLES

Friction angles shall be mounted on the jambs or window as detailed and shall be set true and plumb. They shall receive and hold in position the Rolscreen housing and guides.


(G) INSTALLATION

Rolscreens shall be accurately installed in strict accordance with the manufacturer's erection instructions. Guides shall be so mounted that the beaded portions and outside edges of guides shall not be in contact with window jambs. Screen shall operate freely and easily.

Pella

CASEMENT CONSTRUCTION

FEATURES OF Pella CASEMENTS

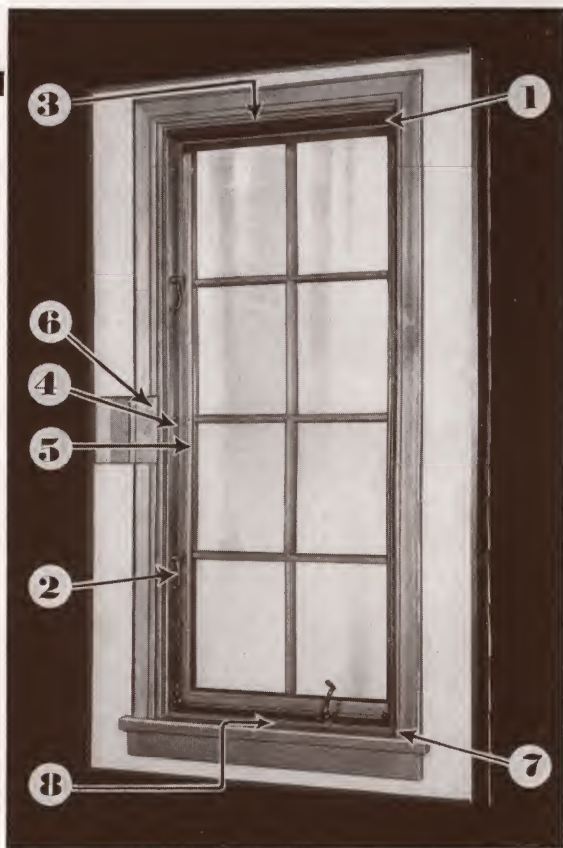

The Window That Has Everything

PELLA CASEMENTS are completely assembled at the factory, sash made of genuine white pine accurately fitted with all hardware, weatherstripping, non-extension cleaning hinges, underscreen sash operator, sash locks, and the famous PELLA ROLSCREENS completely installed. No tedious fitting and assembling on the job.

The PELLA CASEMENT is a complete unit, designed for practical and simple installation to meet the needs of modern air conditioning and ventilating and is highly efficient as to weathering, air leakage, and heat and cold conductivity. PELLA CASEMENTS are among the few really complete windows on the market today.


HEAVY, RUST-PROOF METAL FRAME IS WOOD LINED FOR BEAUTY AND INSULATING QUALITIES

1. **ROLSCREENED**—Equipped with famous Pella ROLSCREENS. No storing, no taking down for window washing.
2. **BEAUTIFUL HARDWARE**—Specially designed. Graceful lines and easy to operate. Satin, polished chrome or Old English Bronze finish.
3. **RIGID METAL FRAMES**— $\frac{1}{8}$ in. rust-proof, special process, zinc-coated steel. $5\frac{1}{8}$ in. wide. Made to fit all walls.
4. **DUAL GLASS**—Removable, single panel, Libbey-Owens-Ford DSA glass protects against winter cold and summer heat.
5. **WEATHERSTRIPPING**—Exclusive design. Alumiseal (especially tempered). Not affected by painting. Adjustable. You can see it work.
6. **INSIDE INTERLOCKING FINS**—Galvanized steel. Can be punched with nails when installing. Light gauge.
7. **WOOD TRIM**—Frame lined with clear white pine (other woods if desired). Insulates—beautifies.
8. **FACTORY ASSEMBLED**—Factory-fitted and assembled complete with sash, ventilating equipment, dual glass and ROLSCREEN.


AUTHENTIC DESIGNS

PELLA CASEMENTS blend into and emphasize the character of any style architecture. They will convey the impression of dignity and stateliness required for colonial architecture, "coziness" for Cape Cod, breadth for Modern or Spanish and sturdiness for half-timbered English.


Can be specified with glass arrangements in either small panes or long, horizontal lights. Vertical muntins may be omitted.

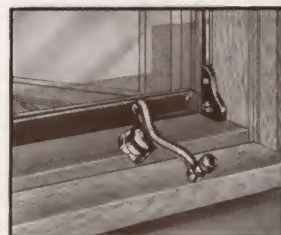


UNDER-SCREEN OPERATOR, worm gear type. Satin, polished chrome or statuary bronze finished handles.

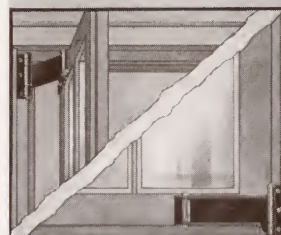


NON-EXTENSION HINGES unlatch so as to permit washing outside of windows from the inside.

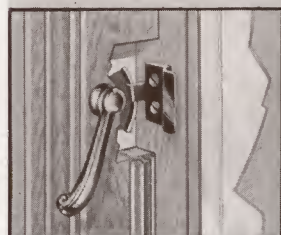

GRACEFUL SASH LOCKS have cam action. Sturdy. Satin, polished chrome or statuary bronze.



STEEL FRAMES fit snugly into any wall. No warping. No joints to pull apart. Galvannealed.

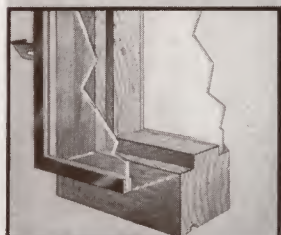

DUAL GLAZING insulates against winter cold and summer heat. Easily removable.



COMPLETELY INSTALLED IN 30 MINUTES



Above: On this home in Salt Lake City, Architect A. B. Paulson has made the first floor casements appear taller by dropping blinds below the sill. Thirty-seven Pella Casements used on this job.



Right: F. G. Avis, the architect who planned this delightful small home in Webster Groves, Mo., has employed Pella Casements throughout in an interesting variety of sizes and arrangement.

SPECIFICATIONS

FRAME—16-gauge ($\frac{1}{16}$ in.) Galvanized Steel—special zinc coated and impregnated, rust-proof, non-flaking. Paint adheres perfectly. Over-all width of frame $5\frac{5}{8}$ in. for net wall thickness of $5\frac{1}{4}$ in.

SASH—Treated Genuine White Pine, $1\frac{3}{4}$ in. thick. Corners mortised and tenoned. Water groove all around. Muntin bars $\frac{3}{8}$ in. between glass; dividing of lights as shown in size schedule is standard. Vertical muntin bars or all muntins may be omitted at no extra cost. Aluminum muntins can be furnished as an extra.

GLASS—Libbey-Owens-Ford SSA Standard: DSA, Obscure, $\frac{1}{8}$ in. plate, leaded optional as extra. Or sash can be furnished unglazed with an allowance for glass.

GLASS SIZES— 9×12 in., except 12×12 in. for 1 light wide units and 8×12 in. for 3 light wide ventilating. If vertical bars are omitted, glass size is $18\frac{3}{8} \times 12$ in. for 2 light wide, $24\frac{3}{4} \times 12$ in. for 8×12 in. 3 light wide.

WEATHERSTRIPPING—Pella Alumiseal (special tempered aluminum alloy), exclusive design—not affected by painting, adjustable—installed so you can see it work.

WOOD TRIM—All wood trim fitted and installed on inside of steel jamb is clear White Pine. Special woods as an extra.

INSIDE INTERLOCKING FINS—Galvanized steel, light gauge—can be punched with nails when installing.

OUTSIDE TRIM—Wood trim in treated genuine White Pine, consisting of brick mould (or outside casing) and wood sub-sill of patterns as detailed furnished as regular equipment. Special wide casing for frame construction furnished as an extra. Drip cap also furnished as an extra when required.

SASH OPERATOR—Worm gear type made integrally with removable steel sill.

SASH LOCKS—Cam action. One lock installed on sash up to three-lights high. Two locks installed on four and five-lights high. Operator and locking handles finished in Old English Bronze (bright or satin chromium optional).

HINGES—Special design double acting, cadmium plated. Sash normally pivots at jamb. By operating simple release, sash pivots away from jamb for washing windows from inside. No exaggerated sash bevel necessary as required with extension hinge. Sash sections are practically $1\frac{3}{4}$ in. square.

MULLIONS—To make up multiple units, individual units are combined with metal mullions as detailed—unusually rigid construction. No extra charge for mullions when outside trim is furnished. Mullions are furnished in lieu of outside wood trim at sides which is not needed when units are combined. Where wood outside trim is furnished by others, there is small extra charge for steel combining mullions. Angular mullions of any degree or corner mullions are available as extras. Units may be set in series with timber between and with metal mullions omitted. Individual units are shipped separate and joined in opening as they are set.

DUAL GLAZING—A single pane of Libbey-Owens-Ford DSA glass set in cadmium plated steel frame and rubber—removable, mounted on wood sash with hinged clips. Prevents frosting in winter—holds out heat in summer.

SCREENS—Famous PELLA ROLSCREENS installed complete. No storing, no taking down for window washing, raised when window is closed, no interference with Venetian Blind installation, no interference with dual glazing.

CAULKING—Ample provision for caulking around sash unit and moulds. Compound and installation screws are included.

[illegible]

SPECIAL KITCHEN UNIT
9"X10" GLASS

CH1



SASH
OPENING



CH 4 V.C.



9

SASH
OPENING



4'-7"



4. 100

Fit above units with sash opening size as shown. Circle heads can be obtained for all standard sizes. For joining units use 1 5/8" horizontal mullion.

TYPICAL UNITS

3 LIGHT WIDE VENTILATING UNITS
USING 8"x12" GLASS ..

SEE SPECIFICATIONS on opposite page for in-


formation on glass sizes, mullions for joining units, hinging and equipment included with complete, factory-assembled units.

MUNTIN BAR ARRANGEMENTS — Standard


arrangements are as shown. Vertical muntins may be omitted at no extra charge. When all muntins are omitted, add for D.S.A. glass. Aluminum muntins are available as well as special muntined arrangements, but at slight extra cost.

VENTILATING OF UNITS—Any or all units


having a sash opening width of 15 1/8", 21 1/2" or 28" may be obtained either stationary or venting; hinged either right or left. Wider units are furnished stationary only.

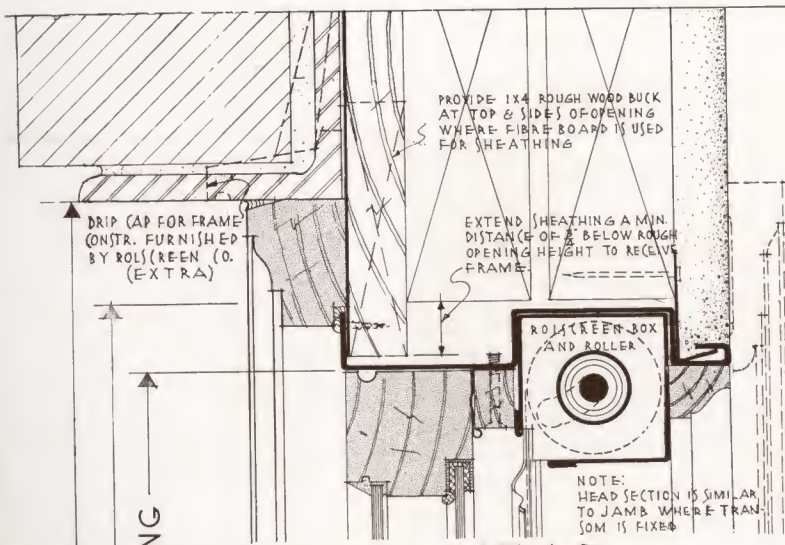


HEAD

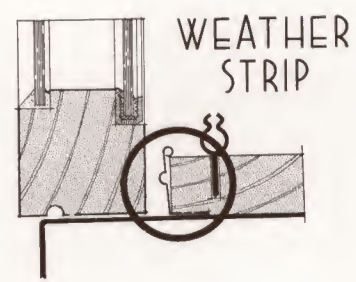

MASONRY OPENING
ROUGH OPENING
1 1/4"
SASH OPENING
SASH OPENING

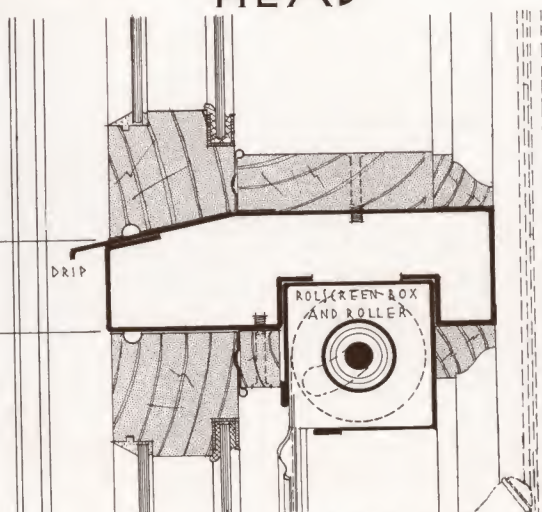


TRANSOM

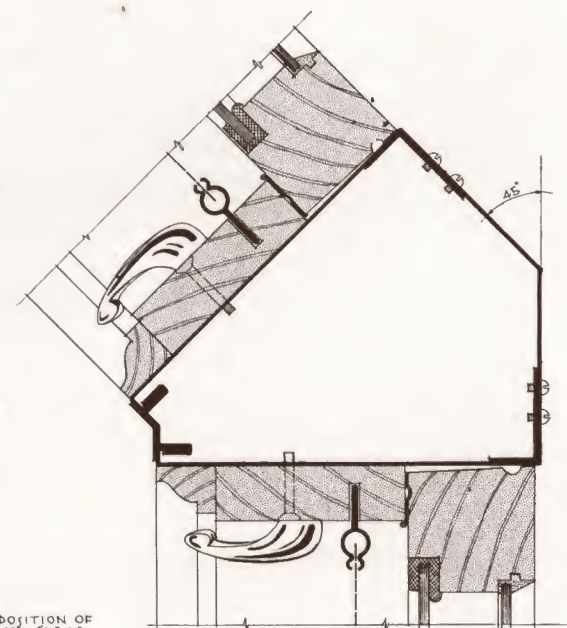


45° MULLION



Typical
Available in any degree

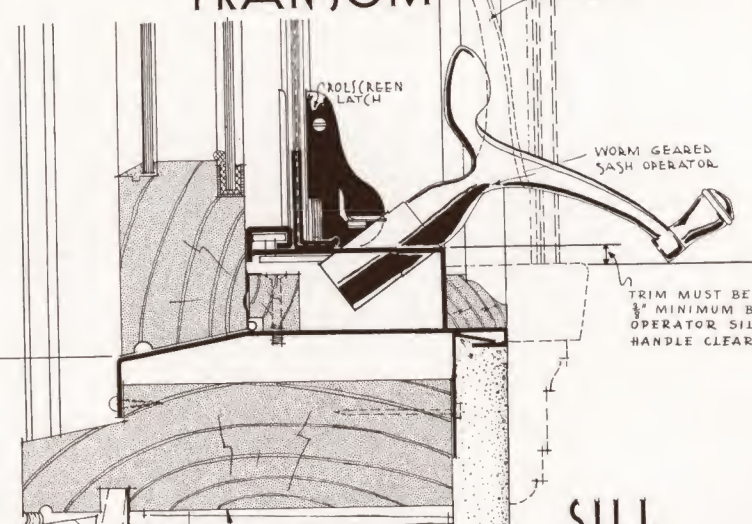

SILL

SHIM UP WOOD SILL TO PROPER HEIGHT & LEVEL BEFORE SETTING FRAME

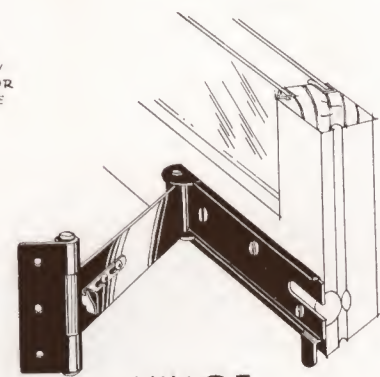

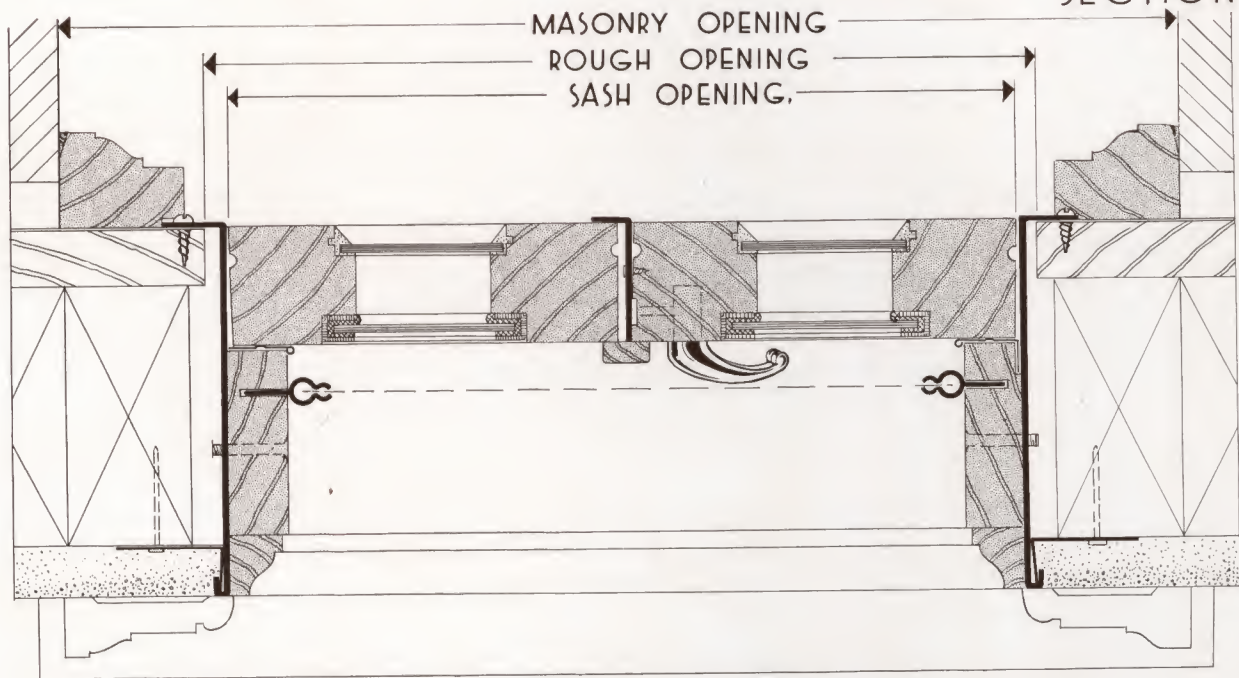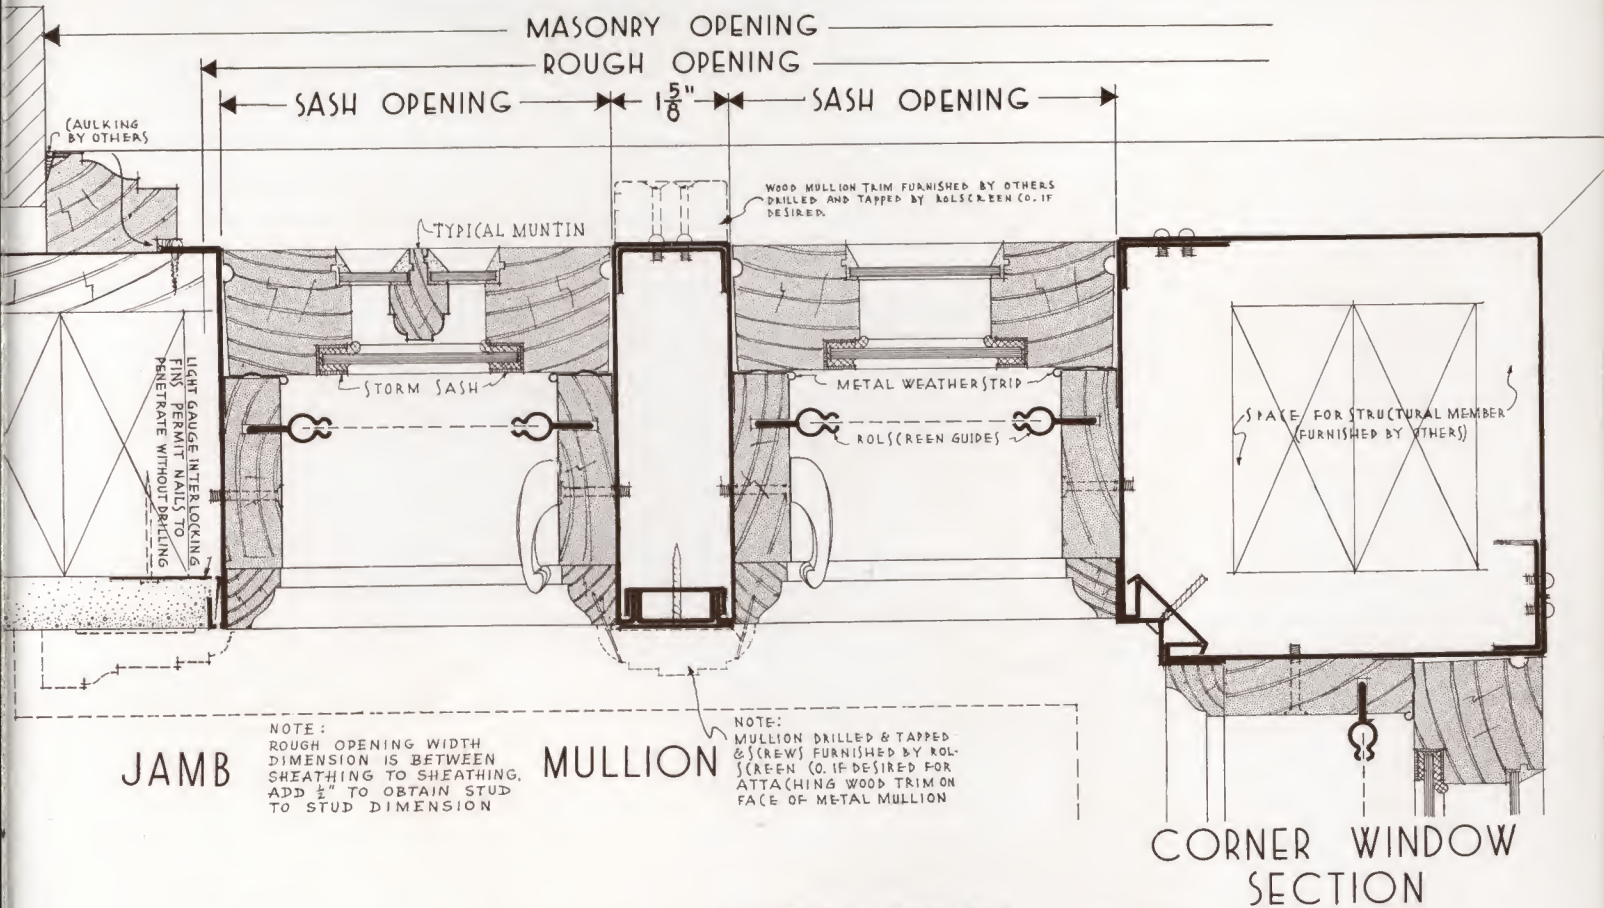

FRENCH WINDOW TYPE "F"

(SINGLE UNITS ~ NO MULLIONS) GLASS SIZE 9"x12"

ALL WOOD PARTS
AS SHADED IN ARE
FURNISHED BY
ROLScreen CO.

SCALE: $\frac{3}{8}$ " = 1"

DETAIL NO. 1105 B

BRICK VENEER WOOD FRAME


WRITE FOR
DETAILS SHOWING
ALL TYPES OF WALL
CONSTRUCTION

Pella CASEMENT WINDOWS


WRITE FOR DETAILS LIKE THESE

showing all types of wall construction


Pella CASEMENT
BRICK VENEER
DETAIL 1109, QUARTER FULL-SIZE

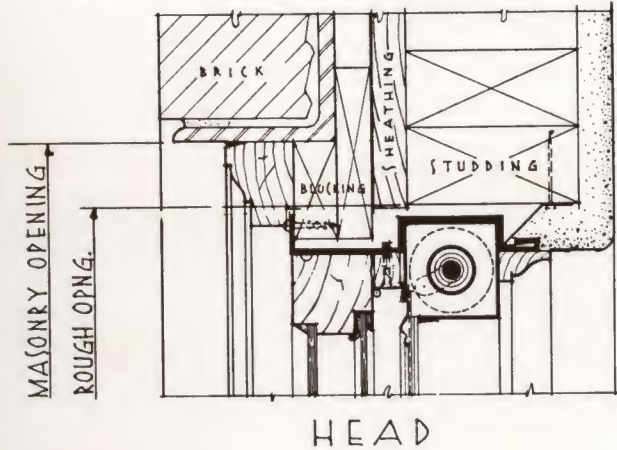

HEAD

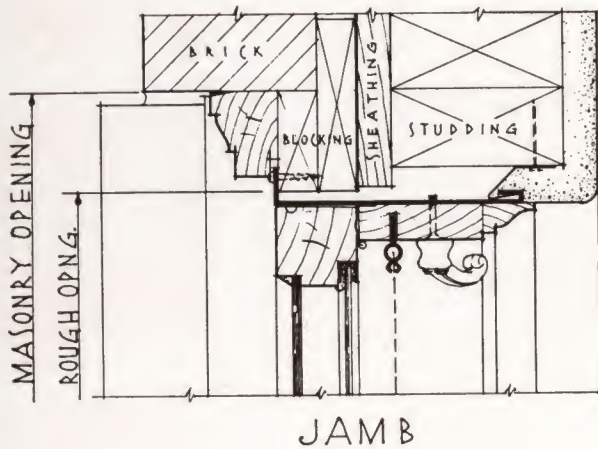


JAMB

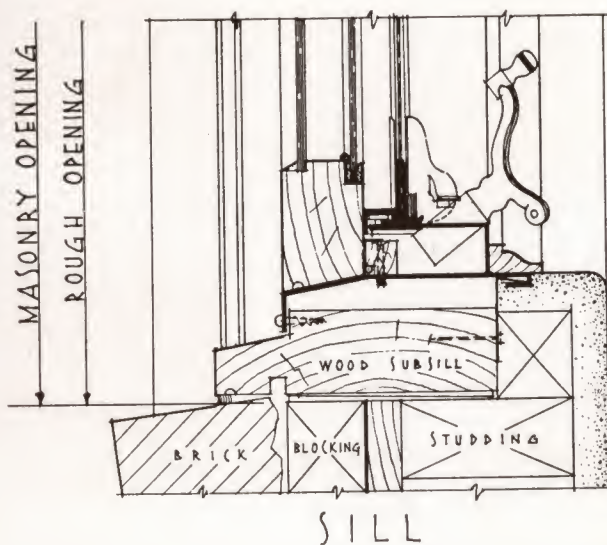


SILL


Pella CASEMENT
9" BRICK WALL
DETAIL 1106, QUARTER FULL-SIZE

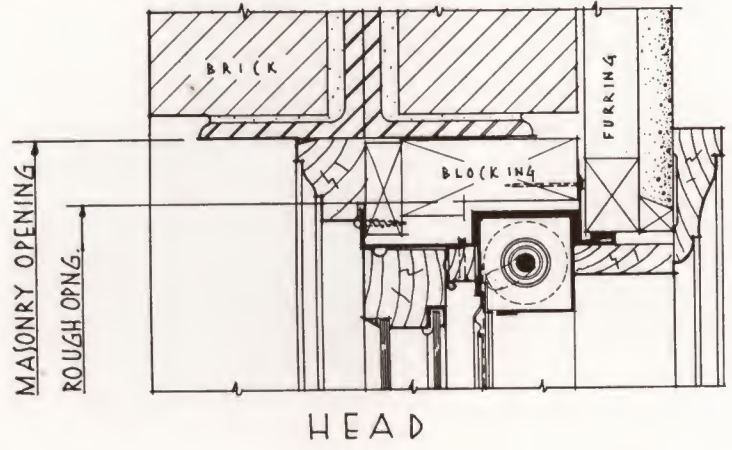


HEAD

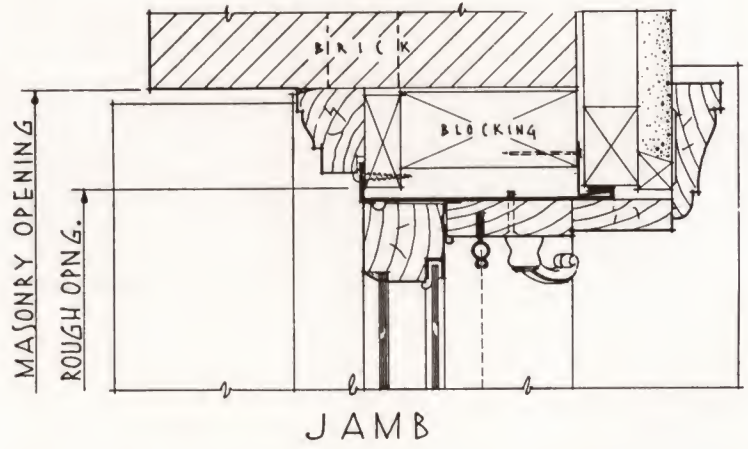

JAMB

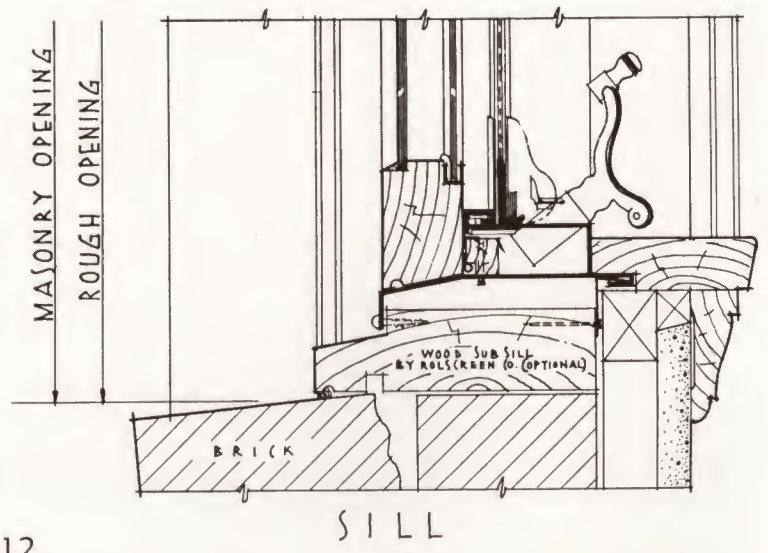

SILL

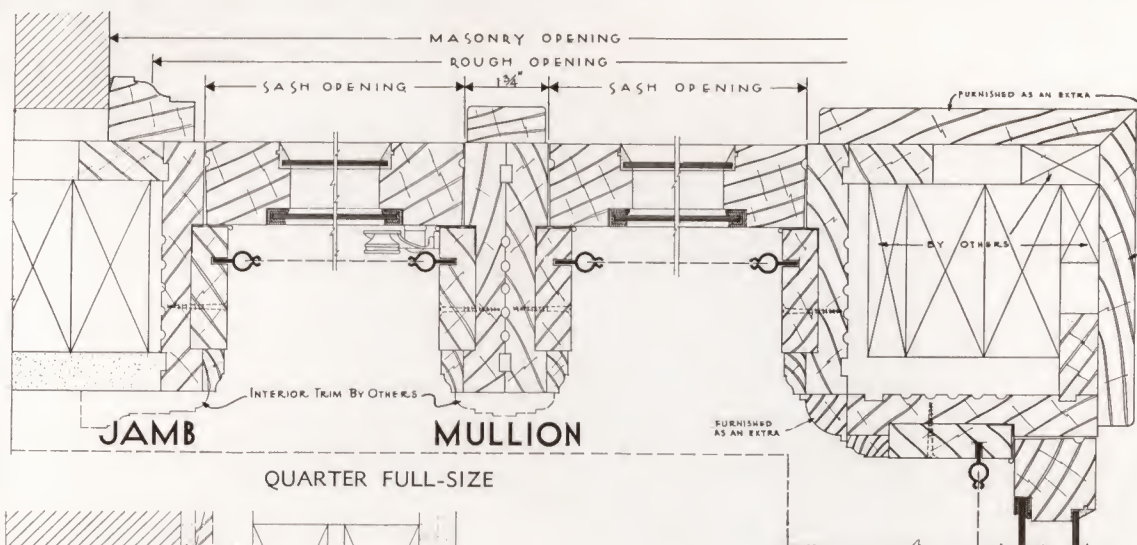

CORNER WINDOW
MULLION

ROLCO CASEMENTS

SHIPPED KNOCKED-DOWN

Though shipped knocked-down these windows are 100% factory pre-fitted. They can be assembled on the job and installed by one man in as little as half the time required for an ordinary window. Highly efficient as to weathering, air leakage, heat and cold conductivity. ROLCO Casements save substantially on wall cost because they are built 20% oversize. WRITE for complete Table of Sizes.

SPECIFICATIONS

FRAME—Sturdy, made of clear Pine, toxic treated. Augmented by wide blind stop. Window stop recessed to insure weather tightness.

SASH—Toxic-treated clear Pine full 1 3/4" thick. Stiles and rails mortised and tenoned. Water groove all around. Glued and steel dowelled.

GLASS—Libbey-Owens-Ford SSB. Size 9 x 12.

WEATHERSTRIPPING—Exclusive alumiseal compression type. Adjustable. Not affected by painting.


MUNTIN BARS—1/4" between glass, overall width 3/4". Division of lights as shown in Size Schedule is standard. Vertical muntins may be omitted at no extra charge.

DUAL GLAZING—Single panel D.S.A. glass set in rubber lined, cadmium plated, steel frame. Removable.

SASH OPERATOR—Lever type. Locks in any position.

SASH LOCK—Cam type. Old English bronze finish (bright chromium optional).

SCREENS—Famous Pella Rolscreen, Rustproof AluminA wire cloth.

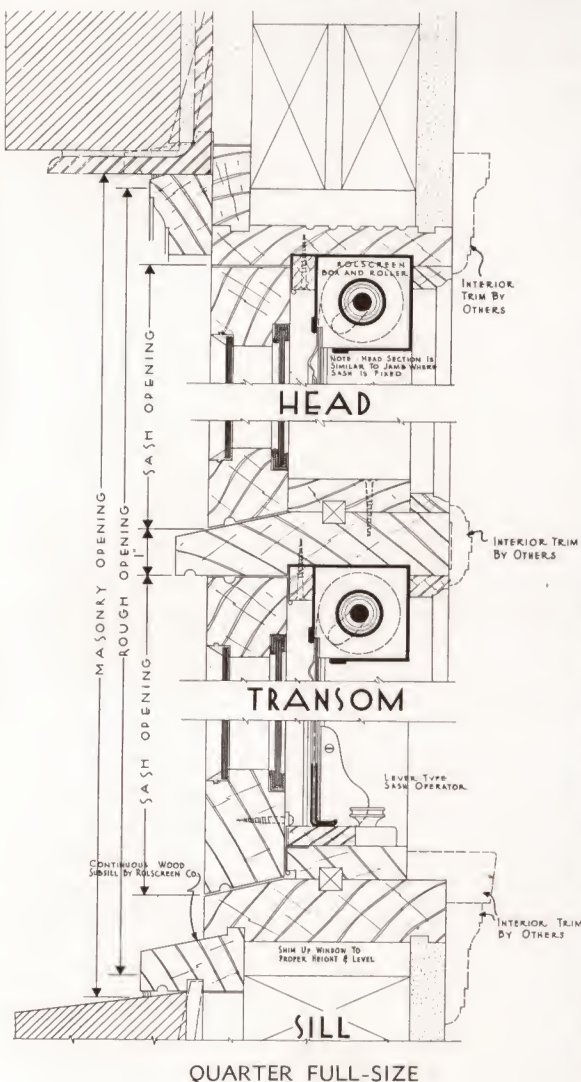

QUARTER FULL-SIZE

GENERAL INFORMATION

ROLCO FRAME has special designed grooved jamb and recessed liner for extra strength.

BAR TYPE OPERATOR locks in any position. Operates under the Rolscreen. Convenient and easy to use.


DUAL GLASS protects against winter cold and summer heat. Practically invisible. Removable.

BRICK MOULDS (also serve as casing on siding, shingles or stucco) and sub-sills of pattern as de-


tailed are included in arriving at masonry opening and are standard equipment. If omitted credit allowance is made. For siding or stucco, wood drip cap can be furnished as an extra.

ROLSCREENS roll up and down like window shades. No putting up. No taking down. 10 year guarantee.

WEATHERSTRIPPING—Exclusive compression type Alumiseal. Not affected by paint. You can see it work.

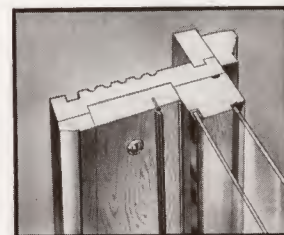

WEATHER TIGHT FRAME

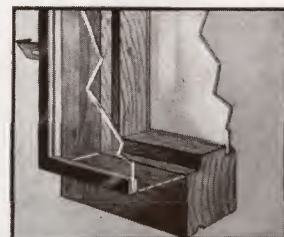


DUAL GLAZING



BAR TYPE OPERATOR



ROLSCREENS BUILT IN

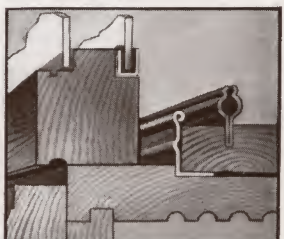

ALUMISEAL WEATHER
STRIPPING

Pella VENETIAN BLINDS

conceal all mechanism into neat enclosed head piece



FEATURES OF PELLA VENETIAN BLINDS

All mechanics concealed—eliminating expense of wooden cornices or valances. Mechanism enclosed in a sturdy metal housing only $1\frac{3}{8}$ in. deep. No interference with drapes. Non-slipping, Double Roller Tilting Device: one roller unwinds as the other roller rewinds. Can be quickly adjusted. Ingenious Automatic Lock securely holds blind at any point desired. It cannot slip and doesn't bite cords. Large oversize pulleys—1 in. diameter—greatly reduce cord wear. Slats nest into a neat bundle—20% smaller in size—eliminates light lines or "peek holes." See illustration below.

SPECIFICATIONS

HEAD MEMBER—Shall be an all-metal rigid housing $1\frac{3}{8}$ in. deep by $2\frac{1}{2}$ in. wide.

TILTING MECHANISM—All tilting mechanism shall be concealed in head member and shall consist of a gear-synchronized pair of rollers for winding and unwinding supporting ladder tapes, all to be adjusted so as to be positive, operate easily, tilt without cord slippage and to hold slats in any tilted position.

PULLEYS—Cold rolled steel 1 in. diameter. Concave raceways.

AUTOMATIC CORD LOCK—Non-slip, non-cutting. To positively lock at any point without backlash.

BRACKETS—Heavy steel, of design as required.

SLATS AND BOTTOM RAIL—Shall be made of strictly selected No. 1 Western Yellow Cedar, smoothly finished. Clean cut cord holes in slats. Slats to be $\frac{1}{8}$ in. thick by $1\frac{3}{4}$ in., 2 in. or $2\frac{3}{8}$ in. wide. Bottom rail to be $\frac{3}{4}$ in. thick on small blinds and $1\frac{1}{8}$ in. thick on large and of same width as slats. All edges to be rounded.


FINISH—Shall consist of three coats synthetic enamel—supplied in 18 standard colors.

LADDER TAPE—Best quality interwoven—supplied in 15 standard colors.

CORDS—Heavy duty, hollow braided, glazed.

GUIDES (When specified)—Cold rolled channels $\frac{1}{8} \times \frac{3}{8}$ in. Guide shoes on every 8th slat.

TYPE OF LIFT—Blinds of 50 sq. ft. and under shall be single lift unless over 72 in. wide. Double lift shall be furnished on blinds of 50 sq. ft. and over and on blinds over 72 in. wide.



BUNDLING FEATURE

BUNDLE SIZE


Approximate size of bundle including housing and bottom when blind is raised.

Blind Height	$1\frac{3}{4}$ " Slats	2" Slats	$2\frac{3}{8}$ " Slats
36"	7"	$6\frac{1}{2}$ "	6"
48"	$8\frac{1}{4}$ "	$7\frac{3}{4}$ "	7"
60"	$9\frac{1}{2}$ "	9"	8"
72"	$11\frac{3}{4}$ "	$10\frac{1}{2}$ "	9"
84"	13"	$11\frac{3}{4}$ "	10"
96"	$14\frac{1}{4}$ "	$13\frac{1}{4}$ "	11"
108"	$15\frac{1}{2}$ "	$14\frac{3}{4}$ "	12"
130"	$16\frac{3}{4}$ "	16"	13"

INSTALLATION DETAIL


Pella VENETIAN BLINDS

ASSEMBLY

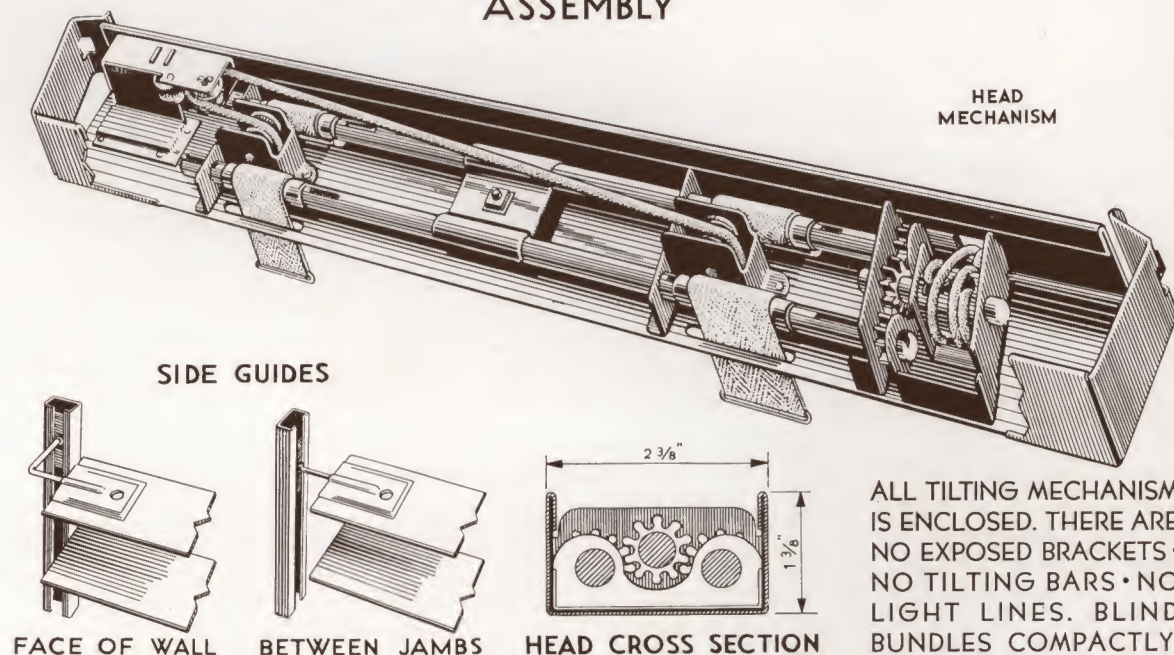


ROLSCREENS AND PELLA VENETIAN BLINDS

DOUBLE HUNG WINDOWS FRAME CONSTRUCTION




STEEL CASEMENTS




WOOD CASEMENTS


MASONRY CONSTRUCTION




FRAME CONSTRUCTION



MASONRY CONSTRUCTION




BRICK VENEER




DIMENSIONS FOR GUIDED BLINDS

BETWEEN JAMBS







NOTES: ALL FREE HANGING INSTALLATIONS SHOWN ON THIS PAGE CAN BE MADE WITH BLINDS GUIDED AT SIDES OF OPENINGS IF THESE DIMENSIONS ARE OBSERVED. HEIGHT DIMENSIONS FOR GUIDED BLINDS ARE SAME AS FOR FREE HANGING BLINDS.



FACE OF WALL



END SUPPORTS



CENTER SUPPORTS



THE STOCK END SUPPORT BRACKETS FOR PELLA BLINDS SHOWN IN THIS COLUMN CAN BE ORDERED BY NUMBER. IF THEY DO NOT MEET SPECIAL CONDITIONS, SUBMIT SKETCH AND DIMENSIONS.

REPRESENTATIVES OF

Pella

PRODUCTS

DISTRIBUTING OFFICES FOR ROLSCREEN COMPANY PRODUCTS
EITHER USE TELEPHONE NUMBER AS LISTED OR WRITE MANAGER AT ADDRESS GIVEN

ALABAMA
BIRMINGHAM,
 Joe H. Brady, Mgr.,
 2431 Avenue G, South,
 Phone: 4-2213

MONTGOMERY,
 Shep M. Stewart, Mgr.,
 14 Burton Ave.,
 Phone: Cedar 6048

ARIZONA
PHOENIX,
 A. C. Thomas, Mgr.,
 300 S. 12th St.,
 Phone: 4-4797

ARKANSAS
LITTLE ROCK,
 Van T. Kimber, Mgr.,
 118 W. 8th St.,
 Phone: 4-3167

CALIFORNIA
LOS ANGELES,
 Roy D. Adams, Mgr.,
 2812 West 54th St.,
 Phone: AXminster 2-1584

SAN DIEGO
 C. H. Lentz, Mgr.,
 4675 59th St.,
 Phone: Main 4011

SAN FRANCISCO,
 R. A. Parker, Mgr.,
 991 Bryant St.,
 Phone: UNderhill 4612

COLORADO
DENVER,
 E. W. Kugler, Mgr.,
 1357 Inca St.,
 Phone: Main 5807, 7345

CONNECTICUT
WEST HARTFORD,
 L. R. Smith, Mgr.,
 108 Whitman Ave.,
 Phone: 3-8519

D. C.
WASHINGTON,
 Floyd Koonitz, Mgr.,
 1427 Eye St., N. W.,
 Phone: MET 3592

FLORIDA
JACKSONVILLE,
 Geo. P. Coyle, Mgr.,
 418 Park St.,
 Phone: 5-5856

MIAMI,
 C. B. Porterfield, Mgr.,
 164 N. W. 20th St.,
 Phone: 3-1562

ST. PETERSBURG,
 E. L. March, Mgr.,
 1441 Central Ave.,
 Phone: 8905

TAMPA,
 Albert H. Jones, Mgr.,
 Stovall Professional Bldg.,
 Phone: M-1183

GEORGIA
ATLANTA,
 R. S. Van Fleet, Mgr.,
 1673 Johnson Rd., N. E.,
 Phone: Vernon 3692

MACON,
 W. H. Dunlap, Mgr.,
 266 Fifth St.,
 Phone: 1400

IDAHO
BOISE,
 H. T. Bolin, Mgr.,
 1419 E. Bannock St.,
 Phone: 5189

ILLINOIS
CHAMPAIGN,
 Cyrus Vaughn, Jr., Mgr.,
 70 E. University Ave.,
 Phone: 4771

CHICAGO,
 O. L. Henninger, Mgr.,
 307 N. Michigan Ave.,
 Phone: CENTral 2459

DECATUR,
 C. Ray Lyon, Mgr.,
 110 N. Oak Crest,
 Phone: 2-6564

PEORIA,
 Geo. B. Schneider, Mgr.,
 511 Lehmann Bldg.,
 Phone: 6681

ROCKFORD,
 Robt. A. Gibson, Mgr.,
 1232 Benton St.,
 Phone: Forest 2528

SPRINGFIELD,
 George S. Grimmer, Mgr.,
 417 S. Fifth St.,
 Phone: 27311

INDIANA
EVANSVILLE,
 A. G. Schlamp, Mgr.,
 116 Herndon Drive,
 Phone: 3-1480

FT. WAYNE,
 Don White, Mgr.,
 2300 Taylor St.,
 Phone: A-7492

HAMMOND,
 Bert Vanderby, Mgr.,
 6131 Calumet Ave.,
 Phone: 5107

INDIANAPOLIS,
 E. B. McComb, Mgr.,
 6051 Central Ave.,
 Phone: Broadway 4626

IOWA
DES MOINES,
 P. B. Hidlebaugh, Mgr.,
 400 Grand Ave.,
 Phone: 3-1363

KANSAS
TOPEKA,
 Ray Anderson, Mgr.,
 622 New England Bldg.,
 Phone: 3-1491

WICHITA,
 Chester L. Anderson Co.,
 1211 East Douglas,
 Phone: 4-9354

KENTUCKY
LEXINGTON,
 I. H. Stern, Mgr.,
 221 N. Limestone St.,
 Phone: 8570

LOUISVILLE,
 E. G. Silver, Mgr.,
 930 Baxter Ave.,
 Phone: JACKson 4935

LOUISIANA
NEW ORLEANS,
 Arthur Antony, Mgr.,
 1200 St. Charles Ave.,
 Phone: Raymond 1514

MARYLAND
BALTIMORE,
 Wm. C. Kane, Mgr.,
 12 W. Madison St.,
 Phone: MULberry 8130

MASSACHUSETTS
BOSTON,
 R. F. Crane, Mgr.,
 819A Park Sq. Bldg.,
 Phone: LIBerty 1884

WORCESTER,
 M. A. Bemis, Mgr.,
 54 Commercial St.,
 Phone: 3-6068

MICHIGAN
DETROIT,
 Harvey Jewell, Mgr.,
 12503 Grand River Ave.,
 Phone: HOgrath 5190

GRAND RAPIDS,
 Ed. Barnes, Mgr.,
 419 Murray Bldg.,
 Phone: 8-4553

KALAMAZOO,
 C. E. Hamlin, Mgr.,
 1012 W. North St.,
 Phone: 2-7675

LANSING,
 C. W. Fauquher, Mgr.,
 220 Rumsey St.,
 Phone: 2-5802

MINNESOTA
MINNEAPOLIS,
 L. A. Johnson, Mgr.,
 253 Plymouth Bldg.,
 Phone: AT 5301

MISSISSIPPI
GREENWOOD,
 B. T. Kelly, Mgr.,
 1007 Strong Ave.,
 Phone: 1582

MISSOURI
KANSAS CITY,
 D. M. Hettinger, Mgr.,
 321 Westport Rd.,
 Phone: Westport 1210

ST. LOUIS,
 E. A. Johnson, Mgr.,
 7336 Devonshire,
 Phone: Sterling 2405

MONTANA
HELENA,
 Raymond C. Grant, Mgr.,
 511 Power Block,
 Phone: 1500

NEBRASKA
KEARNEY,
 Ray O. Bissell, Mgr.,
 Phone: 20415

OMAHA,
 C. G. Stuben, Mgr.,
 4539 N. 39th St.,
 Phone: Kenwood 2595

NEW HAMPSHIRE
NASHUA,
 Malcolm L. Crockett, Mgr.,
 13 Main St.,
 Phone: Nashua 2035

NEW YORK
ALBANY,
 J. G. Fitzsimmons, Mgr.,
 173 Quail St.,
 Phone: 2-4814 and 8-3919

BUFFALO,
 Fred W. Marks, Mgr.,
 37 W. Tupper St.,
 Phone: Washington 2440

NEW YORK,
 Henry M. Fowler, Mgr.,
 103 Park Ave.,
 Phone: ASHland 4-2484

ROCHESTER,
 E. W. Maurer, Mgr.,
 1406 Temple Building,
 Phone: Main 3720-21

SYRACUSE,
 D. J. Bruce, Mgr.,
 610 S. Salina St.,
 Phone: 2-8241

NO. CAROLINA
ASHEVILLE,
 S. R. Goldman, Mgr.,
 Public Service Bldg.,
 Phone: 1367

CHARLOTTE,
 J. H. Bost, Mgr.,
 914 E. 4th St.,
 Phone: 8044

OHIO
AKRON,
 Fred J. Crisp, Mgr.,
 710 N. Main St.,
 Phone: Jefferson 1015

CINCINNATI,
 N. W. Richardson, Mgr.,
 626 Broadway,
 Phone: CH 2440

CLEVELAND,
 W. J. Hyde, Mgr.,
 474 Rockefeller Bldg.,
 Phone: Main 6973

COLUMBUS,
 H. S. Sterner, Mgr.,
 30 E. Broad St.,
 Phone: AD 2921

DAYTON,
 J. M. Kemper, Mgr.,
 653 Reibold Bldg.,
 Phone: Adams 3481

LIMA,
 Dale L. Johnson, Mgr.,
 133 N. Elizabeth St.,
 Phone: Main 6895

PORTSMOUTH,
 Earl C. Hayes, Mgr.,
 1144 Eighth St.,
 Phone: 505

TOLEDO,
 Don Vollmayer, Mgr.,
 29 Ontario St.,
 Phone: Adams 7131

YOUNGSTOWN,
 J. H. King, Mgr.,
 115 Market St.,
 Phone: 6-6733

OKLAHOMA
TULSA,
 D. D. Merrill, Mgr.,
 1544 E. 6th St.,
 Phone: 2-1506

OREGON
PORTLAND,
 L. C. Allen, Mgr.,
 1433 N. W. Glisan St.,
 Phone: AT 0413

PENNSYLVANIA
ERIE,
 R. J. Schlosser, Mgr.,
 950 West 6th St.,
 Phone: 22-845

PHILADELPHIA,
 W. D. Reading, Mgr.,
 2202 Chestnut St.,
 Phone: Rittenhouse 9140

PITTSBURGH,
 E. K. Geyser, Mgr.,
 200 Cedarhurst St.,
 Phone: EVerglade 2815

SCRANTON,
 J. P. Muldoon, Mgr.,
 1019 Delaware St.,
 Phone: 3-0605

WASHINGTON,
 G. Glenn Miller, Mgr.,
 605 Fayette St.,
 Phone: 1311-J

WILLIAMSPORT,
 J. R. Philips, Mgr.,
 13½ W. 4th St.,
 Phone: 3648

TENNESSEE
MEMPHIS,
 H. C. Foster, Mgr.,
 1584 Union Ave.,
 Phone: 7-2161

NASHVILLE,
 E. Spencer Benton, Mgr.,
 2108 Eighth Avenue South,
 Phone: 8-2733

UNION CITY,
 Bob Bransford, Mgr.,
 T. L. Bransford & Son,
 Phone: 28W

TEXAS
AMARILLO,
 E. L. King, Mgr.,
 312-A West 10th St.,
 Phone: 22739

EL PASO,
 F. Baltz, Mgr.,
 500 E. 10th St.,
 Phone: Main 4441

HOUSTON,
 M. S. Lehman, Mgr.,
 2914 Main St.,
 Phone: Keystone K-32511

UTAH
SALT LAKE CITY,
 D. B. Alder, Mgr.,
 120 W. Third, South,
 Phone: Was. 4718-4719

VIRGINIA
ROANOKE,
 H. L. Rosenbaum, Mgr.,
 1st. St., and Franklin Rd.,
 Phone: 2-2298

WINCHESTER,
 E. W. Armstrong, Mgr.,
 39 E. Piccadilly St.,
 Phone: Win. 639

WASHINGTON
SPOKANE,
 C. L. Modesitt, Mgr.,
 1519 S. Lincoln St.,
 Phone: Riverside 0884

W. VIRGINIA
CHARLESTON,
 K. F. Sydenstricker, Mgr.,
 Morris St. & N. Y. C. R. R.,
 Phone: 26-181, 26-182

WISCONSIN
MILWAUKEE,
 E. T. Ver Halen, Mgr.,
 778 N. Jefferson St.,
 Phone: MArquette 7131

REPRESENTATIVES OF

Pella

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY

www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:



SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

<http://seaa.tulane.edu>

BIR
Joe
243
Pho
MOI
Shep
14
Pho

PHC
A. C
300
Pho

LIT
Van
118
Pho

LOS
Roy
2812
Pho

SAN
C. H
4675
Pho

SAN
R. A
991B
Pho

DEN
E. W
1357
Pho

WEST
L. R
108
Pho

WAS
Floyd
1427
Pho

JACK
Geo.
418
Pho

MIAM
C. B.
164
Pho

ST. PETERSBURG,
E. L. March, Mgr.,
1441 Central Ave.,
Phone: 8905

TAMPA,
Albert H. Jones, Mgr.,
Stovall Professional Bldg.,
Phone: M-1183

GEORGIA
ATLANTA,
R. S. Van Fleet, Mgr.,
1673 Johnson Rd., N. E.,
Phone: Vernon 3692

MACON,
W. H. Dunlap, Mgr.,
266 Fifth St.,
Phone: 1400

IDAHO
BOISE,
H. T. Bolin, Mgr.,
1419 E. Bannock St.,
Phone: 5189

Chester L. Anderson Co.
1211 East Douglas,
Phone: 4-9354

KENTUCKY
LEXINGTON,
I. H. Stern, Mgr.,
221 N. Limestone St.,
Phone: 8570
LOUISVILLE,
E. G. Silver, Mgr.,
930 Baxter Ave.,
Phone: JACkson 4935

LOUISIANA
NEW ORLEANS,
Arthur Antony, Mgr.,
1200 St. Charles Ave.,
Phone: Raymond 1514

MARYLAND
BALTIMORE,
Wm. C. Kane, Mgr.,
12 W. Madison St.,
Phone: MULberry 8130

NEBRASKA
KEARNEY,
Ray O. Bissell, Mgr.,
Phone: 20415
OMAHA,
C. G. Stuben, Mgr.,
4539 N. 39th St.,
Phone: Kenwood 2595

NEW HAMPSHIRE
NASHUA,
Malcolm L. Crockett, Mgr.,
13 Main St.,
Phone: Nashua 2035

NEW YORK
ALBANY,
J. G. Fitzsimmons, Mgr.,
173 Quail St.,
Phones: 2-4814 and 8-3919
BUFFALO,
Fred W. Marks, Mgr.,
37 W. Tupper St.,
Phone: Washington 2440

YOUNGSTOWN,
J. H. King, Mgr.,
115 Market St.,
Phone: 6-6733
OKLAHOMA
TULSA,
D. D. Merrill, Mgr.,
1544 E. 6th St.,
Phone: 2-1506
OREGON
PORTLAND,
L. C. Allen, Mgr.,
1433 N. W. Gilsan St.,
Phone: AT 0413

PENNSYLVANIA
ERIE,
R. J. Schlosser, Mgr.,
950 West 6th St.,
Phone: 22-845
PHILADELPHIA,
W. D. Reading, Mgr.,
2202 Chestnut St.,
Phone: Rittenhouse 9140

H. L. Rosenbaum, Mgr.,
1st. St., and Franklin Rd.,
Phone: 2-2298
WINCHESTER,
E. W. Armstrong, Mgr.,
39 E. Piccadilly St.,
Phone: Win. 639

WASHINGTON
SPOKANE,
C. L. Modesitt, Mgr.,
1519 S. Lincoln St.,
Phone: Riverside 0884

W. VIRGINIA
CHARLESTON,
K. F. Sydenstricker, Mgr.,
Morris St. & N. Y. C. R. R.,
Phone: 26-181, 26-182

WISCONSIN
MILWAUKEE,
E. T. Ver Halen, Mgr.,
778 N. Jefferson St.,
Phone: MArquette 7131